


# FASCIA COVER LT PRINT APPROVAL

ANSI/SPRI ES-1 CERTIFIED -  
.040" Aluminum = 180 psf, 24 GA Steel = 210 psf

Face Height	Nail Qty.
8" max.	4
6"	3
4½"	2
3" min.	1

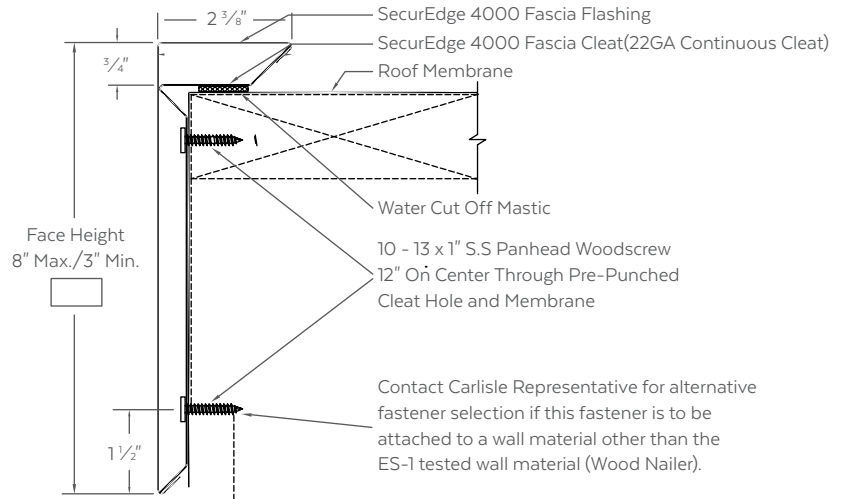

## MATERIAL

24GA .040" AL  
22GA .050" AL  
Other: .063" AL

Finish: \_\_\_\_\_  
Color: \_\_\_\_\_

## QUANTITIES

Lineal Feet (10'-0" Lengths): \_\_\_\_\_

Outside Miters\*: \_\_\_\_\_ Optional Welded (Surcharge Applies)  
Inside Miters\*: \_\_\_\_\_ Optional Welded (Surcharge Applies)  
Right End Caps\*: \_\_\_\_\_ Optional Welded (Surcharge Applies)  
Left End Caps\*: \_\_\_\_\_ Optional Welded (Surcharge Applies)  
Splice Plate Tape Sealant: \_\_\_\_\_ Optional Sealant (Surcharge Applies)

\*Standard riveted

## PROJECT DETAILS

Project: \_\_\_\_\_  
Architect: \_\_\_\_\_  
Roofing Contractor: \_\_\_\_\_  
Representative: \_\_\_\_\_

## PRINT APPROVAL

Architect and/or Contractor shall verify all dimensions, sizes, and quantities, All products to be installed in strict accordance with Drexel's printed instructions.

Effective Date: \_\_\_\_\_

Drawn By: \_\_\_\_\_

Approved By: \_\_\_\_\_