

DMC 150SS PROFILE



PANEL DETAILS

AVAILABLE WIDTHS

12", 14", 16", 18", and 20"*

STANDARD PANEL WIDTHS

16", 20"


*Drexel Metals design pressures, wind uplifts and test reports are for specific deck attachments, material gauges, clip spacing and panel widths. A complete specification and listing is available online at www.drexelmetals.com

SUBSTRATES AVAILABLE

- Painted Galvalume® - 24ga and 26ga
- Drexlume® - 24ga and 26ga
- Aluminum - .032"
- Copper - 16 oz and lead-coated copper
- Zinc


IDEAL APPLICATION COMMERCIAL & RESIDENTIAL

Our DMC 150SS roof system will lend striking dimension to any architectural design. This versatile 1-1/2" mechanically seamed panel can be curved to a wide range of radiuses and applications - from barrel roofs to conical shapes and more. Concealed fasteners and a floating clip system reduce the effect of thermal stresses on the panels, helping to maintain a beautifully smooth, uniform appearance despite fluctuations in temperature.

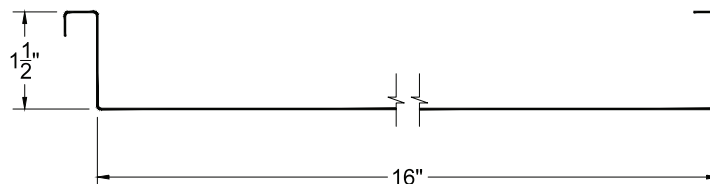

DMC 150SS PROFILE

PROFILE OPTIONS




Single lock panel




Double lock panel


PANEL RIB OPTIONS




Flat Panel




Clip Relief




Striations




Bead




Small V



Large V



Small Pencil



Large Pencil



SHERWIN-WILLIAMS
Coil Coatings

PRODUCT INFORMATION

PROFILE OPTIONS

- Single lock panel
- Double lock panel
- Radius panel (single or double lock)

FINISHES

Available in a wide variety of coatings and colors. See the Drexel Metals color charts for standard colors and paint specifications.

PANEL RIB

Factory made or field rolled to exact lengths options

- Flat Panel
- Bead
- Clip Relief
- Small and Large V
- Striations
- Small and Large Pencil

INSTALLATION

Can be installed over steel decking with Polyiso or plywood decking with approved underlayments. Please see Drexel Metals installation details for complete information.

SLOPE

Minimum slope 2:12

TESTING

- UL 580 Wind Uplift (Class 90)
- TAS 125 Wind Uplift
- UL 1897 Extended Phase Wind Uplift
- UL 2218 Class 4 Hail Impact
- UL 790 Class A Fire Rating
- UL Environmental – SRI Third Party Verified
- ASTM E1646 Water Infiltration
- TAS 100 Wind Driven Rain
- ASTM E1680 Air Infiltration
- ASTM E1886 Missile Impact
- ASTM 2140 Static Pressure Water Head
- Miami-Dade County Approved
- Florida Building Code Approved
- Texas Department of Insurance Approval
- UL 263 Fire Certification

Testing in accordance with



WARRANTY

35 YEAR WARRANTY - GALVALUME AND ALUMINUM SUBSTRATES

35 year non Pro-rated PVDF Paint Warranty

High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

25 YEAR WARRANTY - DREXLUME SUBSTRATE

Mill finished Galvalume® with a two-sided, clear acrylic finish.

CORPORATE HEADQUARTERS: 1234 GARDINER LANE, LOUISVILLE, KY 40213 | 888-321-9630 TOLL-FREE | 502-690-6174 FAX | DREXELMETALS.COM

©2023 Drexel Metals, Inc. All rights reserved. Galvalume® is a registered trademark of BEIC International, Inc. Sherwin-Williams® Coil Coatings is trademark of The Sherwin-Williams Company. Drexlume™ is a trademark of Drexel Metals, Inc. Colors shown represent the actual color as closely as possible. To ensure exact color for final approval, a metal color chip is available. Warranty statements mentioned are outlines; complete Limited Warranty information is available on request. No other warranty expressed or implied is applicable. Please call or visit drexelmetals.com or residentialmetalroof.com for more details.