


Drexel Metals Fascia EC System

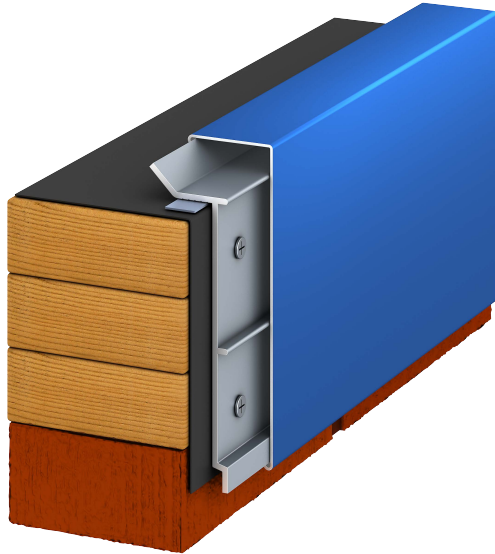

Overview

The Drexel Metals Fascia EC System is a two-part assembly that includes a continuous cleat and a decorative fascia cover for single-ply commercial roof systems. Our Fascia EC is available in pre-painted Kynar500® .032" formed aluminum as well as 24 gauge Galvalume steel. This product features an .080 extruded aluminum pre-punched cleat with fasteners spaced at 12" on center. All products come in standard 10' standard fascia and 12' extruded cleat lengths. Concealed splice plates and fasteners are included with the purchase of this product.

Features and Benefits

- ▤ Secures roof Membrane to Parapet Wall
- ▤ Allows for the use of high-torque screws without penetrating the top surface of the Membrane
- ▤ Pre-Punched Continuous Extruded Cleat that allows for quicker install
- ▤ Staggering pattern of face cover and cleat laps offers additional water protection
- ▤ Stock sizes for quick delivery
- ▤ ANSI-SPRI ES-1 Certified
- ▤ 215 MPH LIFETIME Wind Warranty
- ▤ Gold Standard Warranty
- ▤ Corporate and Custom Colors are available

Installation

For complete installation instructions, please refer to Drexel Metals Architectural specifications and details.

REVIEW CURRENT DREXEL METALS ARCHITECTURAL SPECIFICATION AND DETAILS FOR SPECIFIC INSTALLATION REQUIREMENTS.

Quality Assurance

Drexel Metals Fascia EC system is tested per ANSI/SPRI Test Method RE-2 for fascia. The Fascia EC systems shall be certified by Drexel Metals to design pressures as indicated in current edition of SPRI's Wind Resistance Standard for Edge Systems used with Low Slope Roofing System. This products meets International Building Code minimum requirement.

Technical Services

Engineering and shop drawings, as well as long-form specifications and CAD details, are available from Drexel Metals. Product samples, detail sheets, color chips and color charts are also available for submittal packages. For personal assistance with questions or for full submittals, contact Drexel Metals or your local independent sales representative.

Specifications		
Material	Face	Sustained Pressures
24 gauge	up to 8-1/2"	-300 psf (*)
0.040 AL	up to 8-1/2"	-340 psf (*)
0.032 AL	up to 8-1/2"	-430 psf (*)
22 gauge	up to 11-1/2"	-160 psf (*)
0.050 AL	up to 11-1/2"	-160 psf (*)

* Design Engineer must apply the Factor of Safety

**ADDITIONAL GAUGES - .063 aluminum is available upon request

