


Drexel Metals Spring-Tite Coping w/ Continuous Cleat System

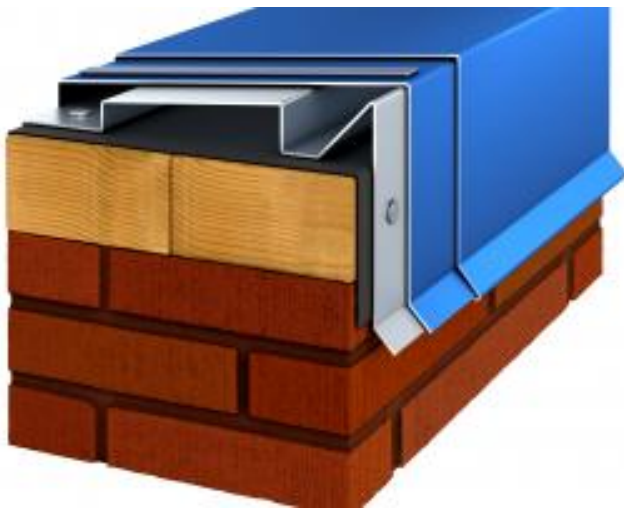

Overview

Drexel Metals Spring-Tite Coping w/ continuous cleat system is a two-part assembly that includes a 10' continuous cleat and a decorative snap-on coping cover for single ply commercial roof systems.

Our Spring-Tite Coping w/ continuous cleat is available as pre-painted Kynar500® in .040" formed aluminum and 24 gauge galvalume steel. This product features a 22-gauge (G90) continuous pre-punched cleat, is available in 10' standard cleat lengths and standard coping cover lengths. Concealed splices plates and fasteners are included with the purchase of this product.

Features and Benefits

- ▤ Secures roof Membrane to Parapet Wall
- ▤ Allows for the use of high-torque screws without penetrating the top surface of the Membrane
- ▤ Pre-Punched Continuous Cleat
- ▤ ANSI-SPRI ES-1 Certified
- ▤ 110 MPH 20-Year Wind Warranty
- ▤ 35-Year Gold Standard Paint Warranty
- ▤ Corporate and Custom Colors are available

DrexelMetals 
Roofing Systems + Custom Fabrication

Installation

For complete installation instructions, please refer to Drexel Metals Architectural specifications and details.

REVIEW CURRENT DREXEL METALS ARCHITECTURAL SPECIFICATION AND DETAILS FOR SPECIFIC INSTALLATION REQUIREMENTS.

Quality Assurance

Drexel Metals Spring-Tite Coping w/ Continuous Cleat system is tested per ANSI/SPRI Test Method RE-3 bi-directional test for wind requirements for Coping and Wall Caps. The Spring-Tite Coping shall be certified by Drexel Metals to design pressures as indicated in current edition of SPRI's Wind Resistance Standard for Edge Systems used with Low Slope Roofing System. This products meets International Building Code minimum requirement.

Technical Services

Engineering and shop drawings, as well as long-form specifications and CAD details, are available from Drexel Metals. Product samples, detail sheets, color chips and color charts are also available for submittal packages. For personal assistance with questions or for full submittals, contact Drexel Metals or your local independent sales representative.

Specifications

| Material | Face | Wall Width | Sustained Pressures |
|----------|----------|----------------|---------------------|
| 24 gauge | up to 6" | <16" max | -105 psf (*) |
| 24 gauge | up to 6" | 16" to 20" max | - 90 psf (*) |
| 0.040 AL | up to 6" | <16" max | -90 psf (*) |
| 0.040 AL | up to 6" | 16" to 20" max | -75 psf (*) |

* Design Engineer must apply the Factor of Safety

**ADDITIONAL GAUGES - .050 and .063 aluminum and 22 gauge Galvalume are available upon request

