


DMC 164 AND DMC 123

DMC WALL SERIES



DMC 164-C AND DMC 164-F

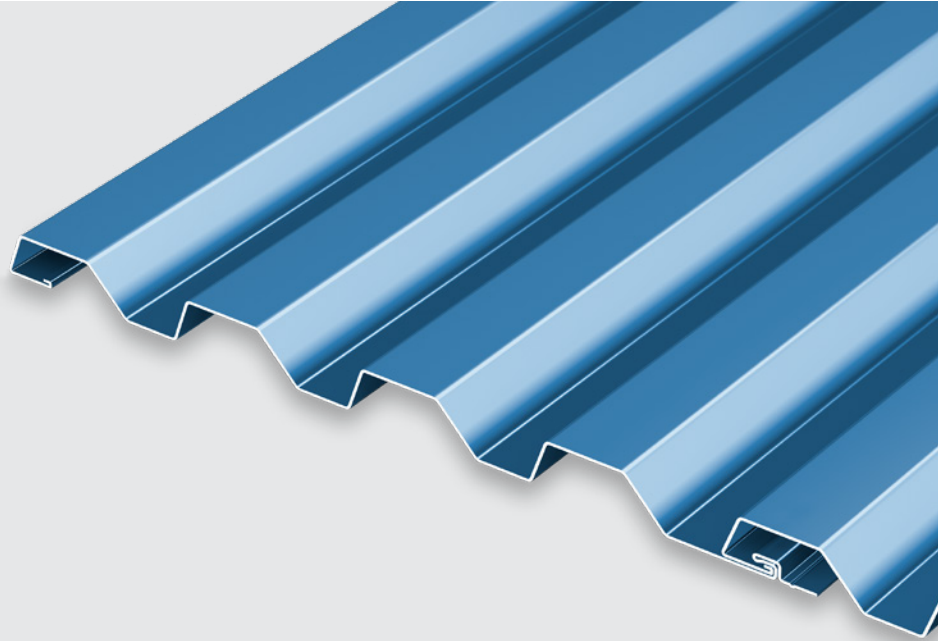

AVAILABLE IN TWO FASTENING OPTIONS



CLIP



FASTENER FLANGE

DMC 123-C AND DMC 123-F



AVAILABLE IN TWO FASTENING OPTIONS



CLIP



FASTENER FLANGE

PRODUCT FEATURES

- No-clip panel, or clip installation for expansion/contraction
- Panel depths of $\frac{7}{8}$ "
- Cost-effective installation
- Horizontal or vertical installation
- Panel lengths:
 - 30' maximum for steel
 - 22' maximum for aluminum on the thru-fastened leg; longer lengths available on clip panels

COLOR OPTIONS

- Over 50 available finishes
- Drexlume™ (acrylic coated Galvalume®)
- Custom options available

TESTING

DMC 164-C and 164-F:

- ASTM E 283
- ASTM E 330
- ASTM E 331
- AAMA 501.1
- ICC-ES ESR-5838

Drexel Metals test reports are for specific attachments, material gauges, clip spacing and panel widths. A complete specification and listing is available online at www.drexelmetals.com

MATERIAL SUBSTRATES

- .032 aluminum
- .040 aluminum
- .050 aluminum
- 24 gauge steel
- 22 gauge steel

SPECS

- 12" or 16" Wide Nominal
- $\frac{7}{8}$ " High