

DMC 550S PROFILE



PANEL DETAILS

STANDARD PANEL WIDTHS

15", 19" Nominal

Drexel Metals design pressures, wind uplifts and test reports are for specific deck attachments, material gauges, clip spacing and panel widths. A complete specification and listing is available online at www.drexelmetals.com


SUBSTRATES AVAILABLE

- Painted Galvalume® – 22ga, 24ga
- Drexlume™ – 22ga, 24ga
- Painted Aluminum – .032", .040"

Not seeing the gauge or material you are looking for?
Contact your local Drexel Metals representative.

IDEAL APPLICATION COMMERCIAL & RESIDENTIAL

A superior integral seam design and quick installation – that's the hallmark of the DMC 550S panel. This expertly crafted interlocking roof system provides a powerfully protective weathertight seam. The finished results deliver a substantial measure of quality and style that's certain to stand the test of time.

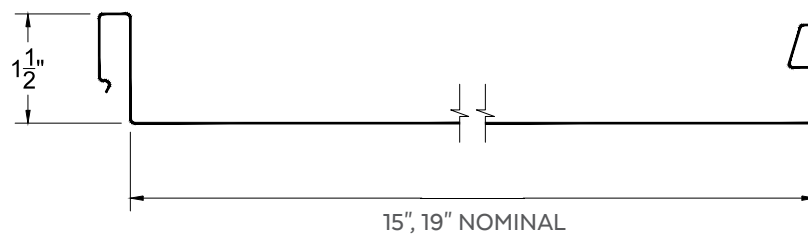


DMC 550S PROFILE


PROFILE OPTIONS




PANEL RIB OPTIONS




Flat Panel




Clip Relief




Striations




Bead




Small V



Large V



Small Pencil



Large Pencil

Contact your local Drexel Metals representative for specific rib option availability.

PRODUCT INFORMATION

FINISHES

Available in a wide variety of coatings and colors. See the Drexel Metals color charts for standard colors and paint specifications.

PANEL RIB

Factory made or field rolled to exact lengths options

- Flat Panel
- Clip Relief
- Striations
- Bead
- Small and Large V
- Small and Large Pencil

INSTALLATION

Can be installed over plywood decking or insulated metal decking with approved underlayments. Please see Drexel Metals installation details for complete information.

SLOPE

Minimum slope 3:12

TESTING

- UL 580 Wind Uplift (Class 90)
- UL 2218 Class 4 Hail Impact
- UL 263 Fire Certification
- UL 790 Class A Fire Rating
- UL 1897 Extended Phase Wind Uplift
- UL Environmental - SRI Third-Party Verified
- ASTM E-1646 - Water Penetration
- ASTM E-1680 - Air Leakage

Testing in accordance with



WARRANTY

35 YEAR WARRANTY - GALVALUME AND ALUMINUM SUBSTRATES

35 year non pro-rated PVDF Paint Warranty

High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

25 YEAR WARRANTY - DREXLUME SUBSTRATE

Mill finished Galvalume with a two-sided, clear acrylic finish.

SHERWIN-WILLIAMS
Coil Coatings