

DMC 450 PROFILE



PANEL DETAILS

STANDARD PANEL WIDTHS

12", 16", and 20"

Drexel Metals design pressures, wind uplifts and test reports are for specific deck attachments, material gauges, clip spacing and panel widths. A complete specification and listing is available online at www.drexelmetals.com

SUBSTRATES AVAILABLE


- Painted Galvalume® - 22ga, 24ga
- Drexlume™ - 22ga, 24ga
- Painted Aluminum - .032", .040"

Not seeing the gauge or material you are looking for? Contact your local Drexel Metals representative.

IDEAL APPLICATION

COMMERCIAL & RESIDENTIAL

Installation ease with impeccable results makes our DMC 450 roof system a standout choice. The 1½" Snap Lock profile and DMC 450 Clip create a continuous interlocking system that installs quickly, reducing labor costs. The concealed fastener and clip application also allow thermal expansion and contraction movement to help keep the beautiful finish straight and true.

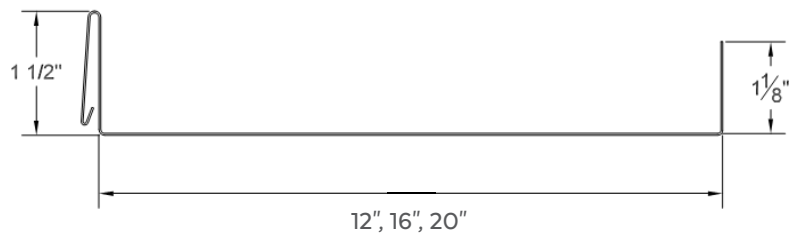


DMC 450 PROFILE


PROFILE OPTIONS




PANEL RIB OPTIONS




Flat Panel




Clip Relief




Striations




Bead




Small V



Large V



Small Pencil



Large Pencil

Contact your local Drexel Metals representative for specific rib option availability.

PRODUCT INFORMATION

FINISHES

Available in a wide variety of coatings and colors. See the Drexel Metals color charts for standard colors and paint specifications.

PANEL RIB

Factory made or field rolled to exact lengths options

- Flat Panel
- Clip Relief
- Striations
- Bead
- Small and Large V
- Small and Large Pencil

INSTALLATION

Can be installed over plywood decking with approved underlayments. Please see Drexel Metals installation details for complete information.

SLOPE

Minimum slope 3:12

TESTING

- UL 580 Wind Uplift (Class 90) / UL 1897
- UL 2218 Class 4 Hail Impact
- UL 263 Fire Certification
- UL 790 Class A Fire Rating
- UL Environmental - SRI Third-Party Verified
- Florida Building Code Approved

Testing in accordance with



WARRANTY

35 YEAR WARRANTY - GALVALUME AND ALUMINUM SUBSTRATES

35 year non pro-rated PVDF Paint Warranty

High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

25 YEAR WARRANTY - DREXLUME SUBSTRATE

Mill finished Galvalume with a two-sided, clear acrylic finish.

SHERWIN-WILLIAMS
Coil Coatings