

SECURE-LOK FASCIA PRINT APPROVAL


ANSI/SPRI ES-1 CERTIFIED -
8.25": .040" Aluminum = 170 psf, 24GA Steel = 210 psf

ANSI/SPRI ES-1 CERTIFIED -
12.75": .050" Aluminum = 220 psf, 22GA Steel = 150 psf, 24GA Steel = 100 psf



MATERIAL CODE: 800992

"A"	"B"	Nailers Covered
5 1/4"	2 7/8"	1
6 3/4"	4 3/8"	2
8 1/4"	5 7/8"	3
9 3/4"	7 3/8"	4
10 1/4"	7 7/8"	5
12 3/4"	10 3/8"	6

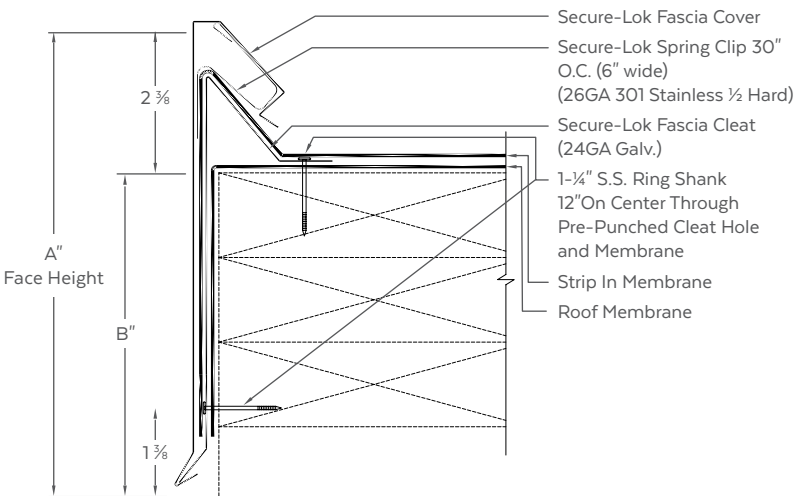

MATERIAL

24GA .040" AL

22GA .050" AL

Other: .063" AL

Finish: _____

Color: _____

QUANTITIES

Lineal Feet (10'-0" Lengths): _____

Outside Miters*: _____ Optional Welded (Surcharge Applies)

Inside Miters*: _____ Optional Welded (Surcharge Applies)

Right End Caps*: _____ Optional Welded (Surcharge Applies)

Left End Caps*: _____ Optional Welded (Surcharge Applies)

* Standard riveted

PROJECT DETAILS

Project: _____

Architect: _____

Roofing Contractor: _____

Representative: _____

PRINT APPROVAL

Architect and/or Contractor shall verify all dimensions, sizes, and quantities, All products to be installed in strict accordance with Drexel's printed instructions.

Effective Date: _____

Drawn By: _____

Approved By: _____