


SNAP COPING MAX-C

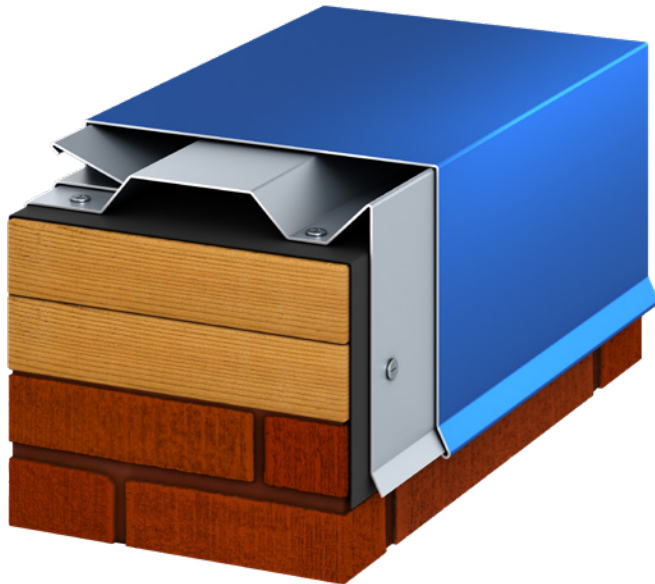

Snap Coping-Max-C System is an assembly that includes a segmented cleat, a spring clip, and a decorative snap-on coping cover for single-ply roofs. (Concealed splice plates and fasteners included.) Allows for installing fasteners vertically only (up to 6" face).

FEATURES AND BENEFITS

- Secures roof Membrane to Parapet Wall
- Allows for the use of high-torque screws without penetrating the top surface of the Membrane
- Allows for Longer Face and Wider Width Design/Install
- Pre-Punched Segmented Cleat
- ANSI-SPRI ES-1 Certified
- 90 mph/20 year Wind Warranty
- 35 Year Gold Standard Paint Warranty
- Corporate and Custom Colors are available

INSTALLATION

For complete installation instructions, please refer to Drexel Metals Architectural specifications and details.

REVIEW CURRENT DREXEL METALS ARCHITECTURAL SPECIFICATION AND DETAILS FOR SPECIFIC INSTALLATION REQUIREMENTS.

QUALITY ASSURANCE

Tested in accordance with ANSI/SPRI/FM4435/ES-1 Test Standard For Edge Systems Used With Low Slope Roofing Systems to comply with the International Building Code.

TECHNICAL SERVICES

Engineering and shop drawings, as well as long-form specifications and CAD details, are available from Drexel Metals. Product samples, detail sheets, color chips and color charts are also available for submittal packages. For personal assistance with questions or for full submittals, contact Drexel Metals or your local independent sales representative.

PRODUCT SPECIFICATIONS

| Material | Face | Wall Width | Sustained Pressures |
|----------|-----------|------------|---------------------|
| 24 gauge | up to 12" | up to 24" | -170 psf (*) |
| .040 AL | up to 12" | up to 24" | -180 psf (*) |
| .050 AL | up to 12" | up to 32" | -155 psf (*) |

*Design Engineer must apply the Factor of Safety

**ADDITIONAL GAUGES - .050 and .063 aluminum and 22 gauge Galvalume are available upon request