



FACADE BR - Z-GIRT  
**WINDOW JAMB DETAIL**  
HORIZONTAL APPLICATION

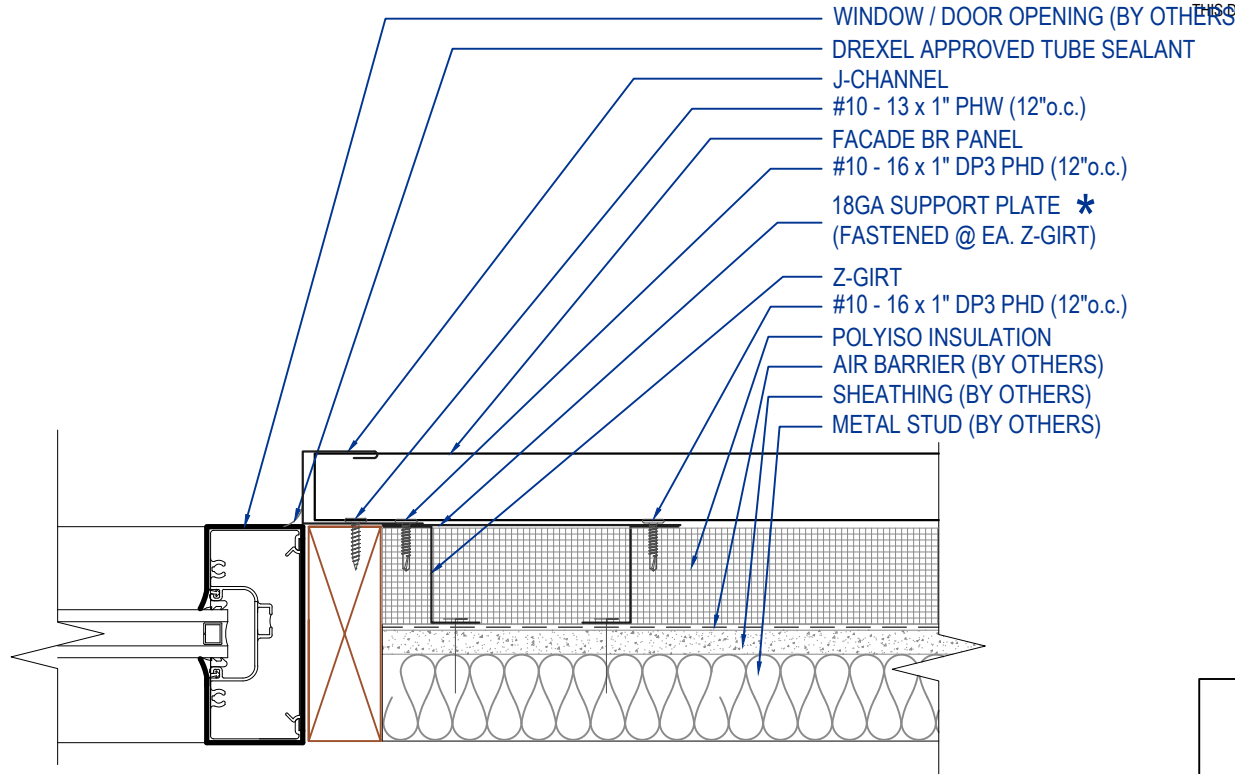

THIS DETAIL DRAWING IS APPLICABLE TO ALL FACADE BR SERIES WALL PANEL PROFILES


- WINDOW / DOOR OPENING (BY OTHERS)
- DREXEL APPROVED TUBE SEALANT
- J-CHANNEL
- #10 - 13 x 1" PHW (12"o.c.)
- FACADE BR PANEL
- #10 - 16 x 1" DP3 PHD (12"o.c.)
- 18GA SUPPORT PLATE \*  
(FASTENED @ EA. Z-GIRT)
- Z-GIRT
- #10 - 16 x 1" DP3 PHD (12"o.c.)
- POLYISO INSULATION
- AIR BARRIER (BY OTHERS)
- SHEATHING (BY OTHERS)
- METAL STUD (BY OTHERS)



(CONCEALED CLIP OPTION)

**KEYNOTES:**


- TRIM FASTENERS ARE SELF-DRILL PANCAKE HEAD AND MUST BE BE INSTALLED IN A STAGGERED PATTERN
- FASTENERS MUST PENETRATE STEEL SUBSTRATE BY 5/8" MINIMUM THREAD LENGTH

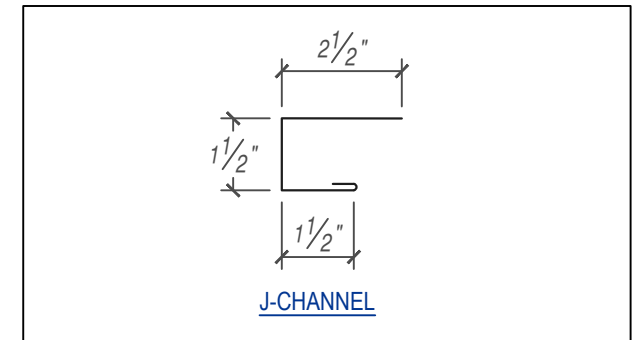

FLASHINGS

\* **NOTE:**  
MAY OMIT SUPPORT PLATE IF ATTACHING FLASHING TO STRUCTURAL MEMBER.

SCALE: 3" = 1'-0"



EFFECTIVE DATE: 01-01-2023  
SUBJECT TO CHANGE WITHOUT NOTICE

DISCLAIMER: DETAIL SHOWN FOR ILLUSTRATION PURPOSES ONLY. ACTUAL PROJECT DETAIL MAY VARY