

DMC 250T PROFILE



PANEL DETAILS

STANDARD PANEL WIDTHS

16", 18" Nominal


Drexel Metals design pressures, wind uplifts and test reports are for specific deck attachments, material gauges, clip spacing and panel widths. A complete specification and listing is available online at www.drexelmetals.com

SUBSTRATES AVAILABLE

- Painted Galvalume® - 22ga, 24ga
- Drexlume™ - 22ga, 24ga
- Aluminum - .032", .040"

IDEAL APPLICATION COMMERCIAL

The DMC 250T elevates performance and aesthetics with a sleek 2" panel profile that stands 2.625 nominal inches above the deck when combined with an attachment clip and cap. It is engineered for slope applications down to ½:12. Factory or field formed to length, it features a bi-directional design that lets installers start at the roof center and work in both directions, speeding installation. A concealed-fastener clip system supports thermal movement, while factory-applied seam sealant on the cap and mechanical field seaming ensure long-term weathertight integrity. Available in multiple steel and aluminum options, the DMC 250T blends efficiency, versatility and structural strength in one premium system.

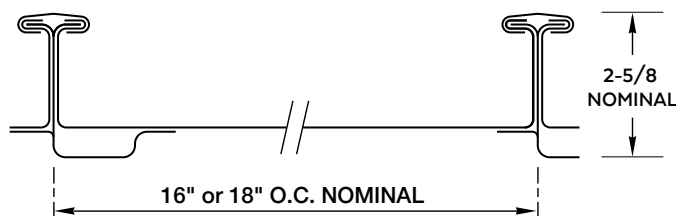


DMC 250T PROFILE


PROFILE




PANEL RIB OPTIONS



Flat Panel

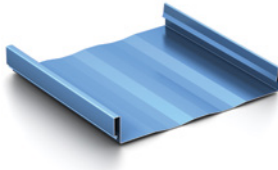

Striations



Pencil Ribs

PRODUCT INFORMATION

FINISHES

Available in a wide variety of coatings and colors. See the Drexel Metals color charts for standard colors and paint specifications.

PANEL RIB

Factory made or field rolled to exact lengths options

- Flat Panel
- Striations
- Pencil Ribs

INSTALLATION

Can be installed over plywood, steel decking, and Polyiso with approved underlayment, or open framing. Please see Drexel Metals installation details for complete information.

MINIMUM ROOF PITCH

½:12 – low roof pitch

TESTING

- UL 580 Wind Uplift (Class 90)
- UL 1897 Extended Phase Wind Uplift
- ASTM 283
- ASTM 331
- ASTM1680
- ASTM 1646
- ASTM E1592
- ASTM E2140

Testing in accordance with



WARRANTY

35 YEAR WARRANTY - GALVALUME AND ALUMINUM SUBSTRATES

35 year non Pro-rated PVDF Paint Warranty

High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

25 YEAR WARRANTY - DREXLUME SUBSTRATE

Mill finished Galvalume with a two-sided, clear acrylic finish.