

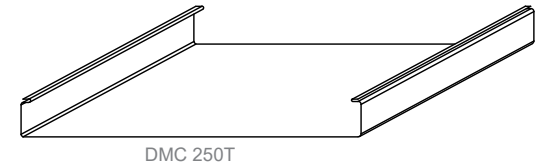


DMC 250T - WOOD SUBSTRATE DETAILS  
VALLEY - OPTION 2  
(NO DIVERTER)



**KEYNOTES:**

- TRIM FASTENERS ARE SELF-DRILL PANCAKE HEAD AND MUST BE BE INSTALLED IN A STAGGERED PATTERN SPACED @ 12" O.C.
- CLIP FASTENERS MUST PENETRATE WOOD SUBSTRATE BY 5/8" MINIMUM THREAD LENGTH

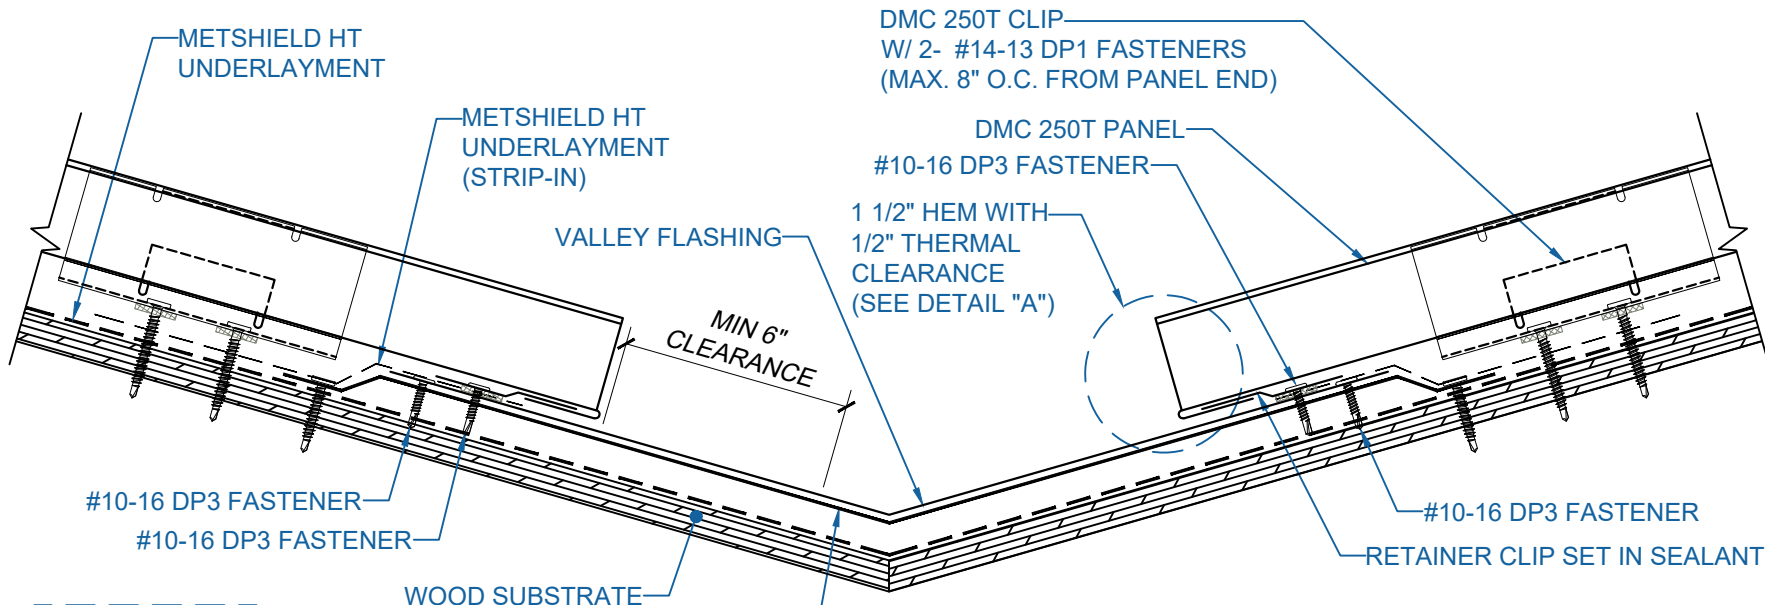


DETAIL "A" ①

① CONTACT CAM/DMC FOR  
JOB SPECIFIC HEM &  
THERMAL CLEARANCE

SCALE: 3" = 1'-0"



EFFECTIVE DATE: 11-01-2025  
SUBJECT TO CHANGE WITHOUT NOTICE

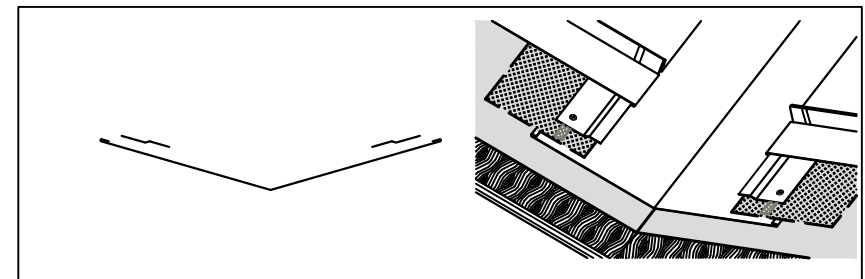

FLASHINGS

DISCLAIMER: DETAIL SHOWN FOR ILLUSTRATION PURPOSES ONLY. ACTUAL PROJECT DETAIL MAY VARY